



The Double Pantile

HIGH QUALITY CONCRETE TILE




FINISH
TOP ONE

The RDUK Double Pantile sets a new standard for tiles which everyone from Architects to Roofers appreciate.

The Double Pantile is superbly crafted, with its flowing 'S' shape the design is perfectly enhanced by the rounded trimmed edge to enhance the finished roof. With a covering capacity of just 9.7 tiles per square metre it also makes the Double Pantile the perfect choice for a very economical and attractive roof. These Double Pantiles are engineered by our partners Nelskamp to the highest of standards and are available in six different colours along with a wide range of fittings. From traditional clay pantiles to beautiful large formats and superbly crafted glazed tiles we have a very wide choice of roofing materials all proven to enhance any type of project.

RDUK
ROOFING DISTRIBUTION UK

Order your **FREE** roof tile sample email: samples@roofingdistributionuk.com

 01375 397 140

 sales@roofingdistributionuk.com

 roofingdistributionuk.com

The Double Pantile Concrete Roof Tile

A high quality concrete tile that re-creates the flowing lines of a traditional pantile with an inherent strength in its 'S' shape design.



Double Pantile technical details

Length:	420mm
Width:	332mm
Gauge:	310 - 345mm
Headlap (min):	75mm (22.5°+), 100mm (17.5°+), 110mm (15°+)
Cover width (mm):	300mm ± 2.0
Minimum roof pitch*:	15° @110mm headlap
Number of tiles per m ² (min):	9.7
Weight per tile:	4.4 kg
Weight per m ² (min):	44 kg
Battens per m ² (min):	3 - 3.2
Batten size (mm):	50 x 25 - 600mm centres
Fixings clips:	Eaves and tile clips
Nails - ring shank aluminium alloy:	45 x 3.35mm
Screw - with neoprene washer seal	45 x 4.5mm

Please Note: Fixing specs may vary due to roof pitch and location



Low Pitch Roof Specification 17° - 15°

- Lay Double Pantile straight bond.
- Headlap minimum 110mm.
- Use appropriate air and vapour permeable underlay, which does not require secondary roof ventilation.
- Lay the roof underlay to the manufacturer's instructions.
- Maximum rafter length 7.5m.
- All tiles to be clipped with RDUK purpose made tile clips, reference 409/002. Do not nail the tiles at 17° and below.
- Roof perimeters including, abutments and around roof windows must be securely fixed to BS 5534.
- Further Low Pitch Roofing Advice is available on our website.

Double Pantile range available in 6 colours

Cayenne Red (01)



Rustic (85)



Anthracite Grey (33)



Dark Brown (04)




Onyx Black (02)



Slate Grey (03)



Double Pantile tile fittings

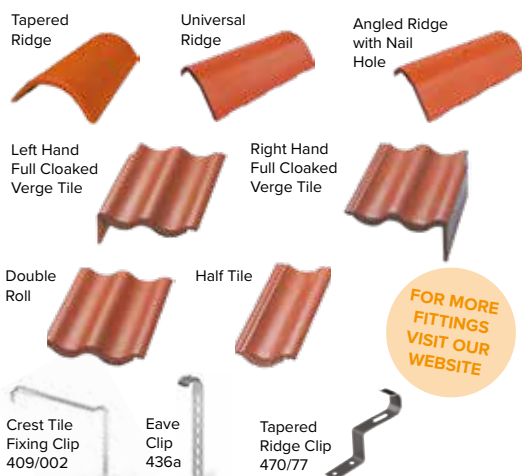

FOR MORE FITTINGS VISIT OUR WEBSITE

- ▶ Superior Quality Double Pantile ▶ Eco friendly Top One finish
- ▶ Cleaner, Smooth Round Trimmed Edges ▶ Only 9.7 tiles per m²
- ▶ Range of Colours & Quality Fittings

Manufactured to comply with the performance standards of EN490/491 and DIN Plus.



For more information on our **Concrete** tiles or to order a **FREE** sample call us on **01375 397 140**

01375 397 140

sales@roofingdistribution.com

roofingdistributionuk.com

RDUK
ROOFING DISTRIBUTION UK