

## Low pitched roofing

# ROOFING DISTRIBUTION UK LOW PITCHED ROOFING ADVICE

Finding a roofing solution for a low pitch or a complex roof can be frustrating and confusing. RDUK high-quality range of roof tiles offer solutions that allow you to easily design roof pitches from a minimum of 10°. All design considerations and the roof installation should always comply with **BS 5250** Management of Moisture in Buildings, **BS 5534** Code of Practice for Slating & Tiling and **BS 8000-6** Workmanship on Building Sites Code of Practice for Slating & Tiling.

### 1. ROOFING UNDERLAY AND VENTILATION

Use appropriate air and vapour permeable breather membrane, which does not require secondary roof ventilation. **Lay the membrane to the manufacturers' instructions.**

### 2. ROOF TILE GAUGE AND HEADLAP

Crest Nelskamp and RDUK has a range of Clay roof tiles which will perform at roof pitches to a minimum of 10 degrees, (G10, H10, H14, F12 & F8.5) with a maximum rafter length of 6m. All of which need to be laid with a minimum 100mm Headlap.  
Please find out more information on our roofing tile data cards.

Crest Nelskamp & RDUK concrete roof tiles can be used at a minimum pitch of 15 degrees. The \*Planum should be laid brokenbond, The Planum Duo should be laid quarter broken bond and Double Roman & Double Pantiles are laid straight bond, with a minimum headlap of 110mm. A rafter length no longer than 7.5m for the flat tiles, Planum and Planum Duo at 15 degrees. Please find out more information on our roofing tile data cards.

### 3. FIXINGS

All clay and concrete roof tiles should be mechanically fixed using RDUK purpose made stainless steel tile clips, **do not nail the tiles at 17° and below.** The local areas around the roof perimeters and abutments must be securely fixed to BS5534, including roof windows, chimneys etc. Site specific fixing specifications are available from RDUK on request. Fixing specifications may vary due to roof pitch and location.

### 4. EAVES

Fix the fascia board at the correct height for the tiles and roof pitch. The measurement from the top of the rafter, is the thickness of the tiling batten plus the thickness of the roof tile.  
It is important to prevent moisture from ponding at the eaves. Fix either an Eaves PVC Support Tray or if necessary install plyboard supports between the rafter and level with the rafters. Above the fascia board install an eaves comb or eaves closure to prevent insects or birds from gaining entry to the batten cavity.  
All eaves tiles must be mechanically fixed with nails and or eaves clips to comply with the site fixing specification.

### 5. VERGE

At the verges use the matching colour of the RDUK cloaked verge purpose made tiles. These are mechanically fixed and do not require any mortar giving a tidy and maintenance free solution.

### 6. DRY RIDGE SYSTEM

All dry fix systems that are used, like ridge, top abutment vents, verge, etc., should be BS8612 accredited and fixed to the manufactures instructions.

### 7. VALLEYS

The minimum recommended pitch for a lead lined valley is 11°. Further design advice can be obtained from the Lead Sheet Association, **email [info@leadsheet.co.uk](mailto:info@leadsheet.co.uk)**  
For GRP valleys please refer to the valley manufacturers recommendations.


\*As per European trademark Nr.7287956, filed on 2nd October 2008, the Trademark PLANUM belongs to La Escandella. It is Dachziegelwerke Nelskamp as authorized licensee of the owner allowed to use the mark PLANUM for its concrete product.



Crest Nelskamp & RDUK Dry Fixing System.



Crest Nelskamp & RDUK clay right hand cloaked verge.

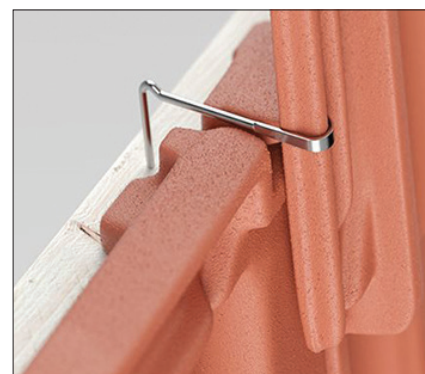

All clay and concrete roof tiles should be mechanically fixed.

For further technical support and information please contact RDUK on tel: **01375 397 140** or email: **[sales@roofingdistributionuk.com](mailto:sales@roofingdistributionuk.com)**

**RDUK**  
ROOFING DISTRIBUTION UK